


Introduction

The CL12492B receiver is designed to support dual pixel data transmission between Host and Flat Panel Display up to QXGA resolution. The receiver converts serial 10-LVDS data streams back into parallel 60bits (Dual Pixel 30-bit color) of LVC MOS data. Control signals (HSYNC, VSYNC, DE) are sent during blanking intervals. The CL12492B receiver is an ideal means to solve EMI and cable size problems associated with wide, high-speed LVC MOS interfaces.


Feature

- 20MHz to 270MHz shift clock support
- Low power single 3.3V
- Clock edge programmable
- Supports VGA, SVGA, XGA, SXGA, UXGA, QXGA
- Supports Dual Link and Single Link
- Supports RGB 18 / 24 / 30
- Narrow bus reduces cable size
- PLL requires no external components
- Power down mode
- Supports Fail-Safe function to all input channels
- Low Profile 120 Lead TQFP Package

Block Diagram

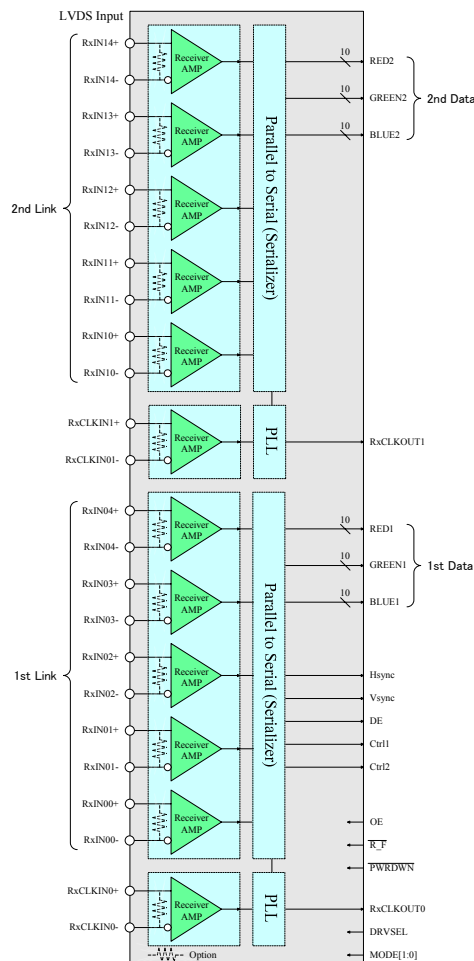

Pin Configuration

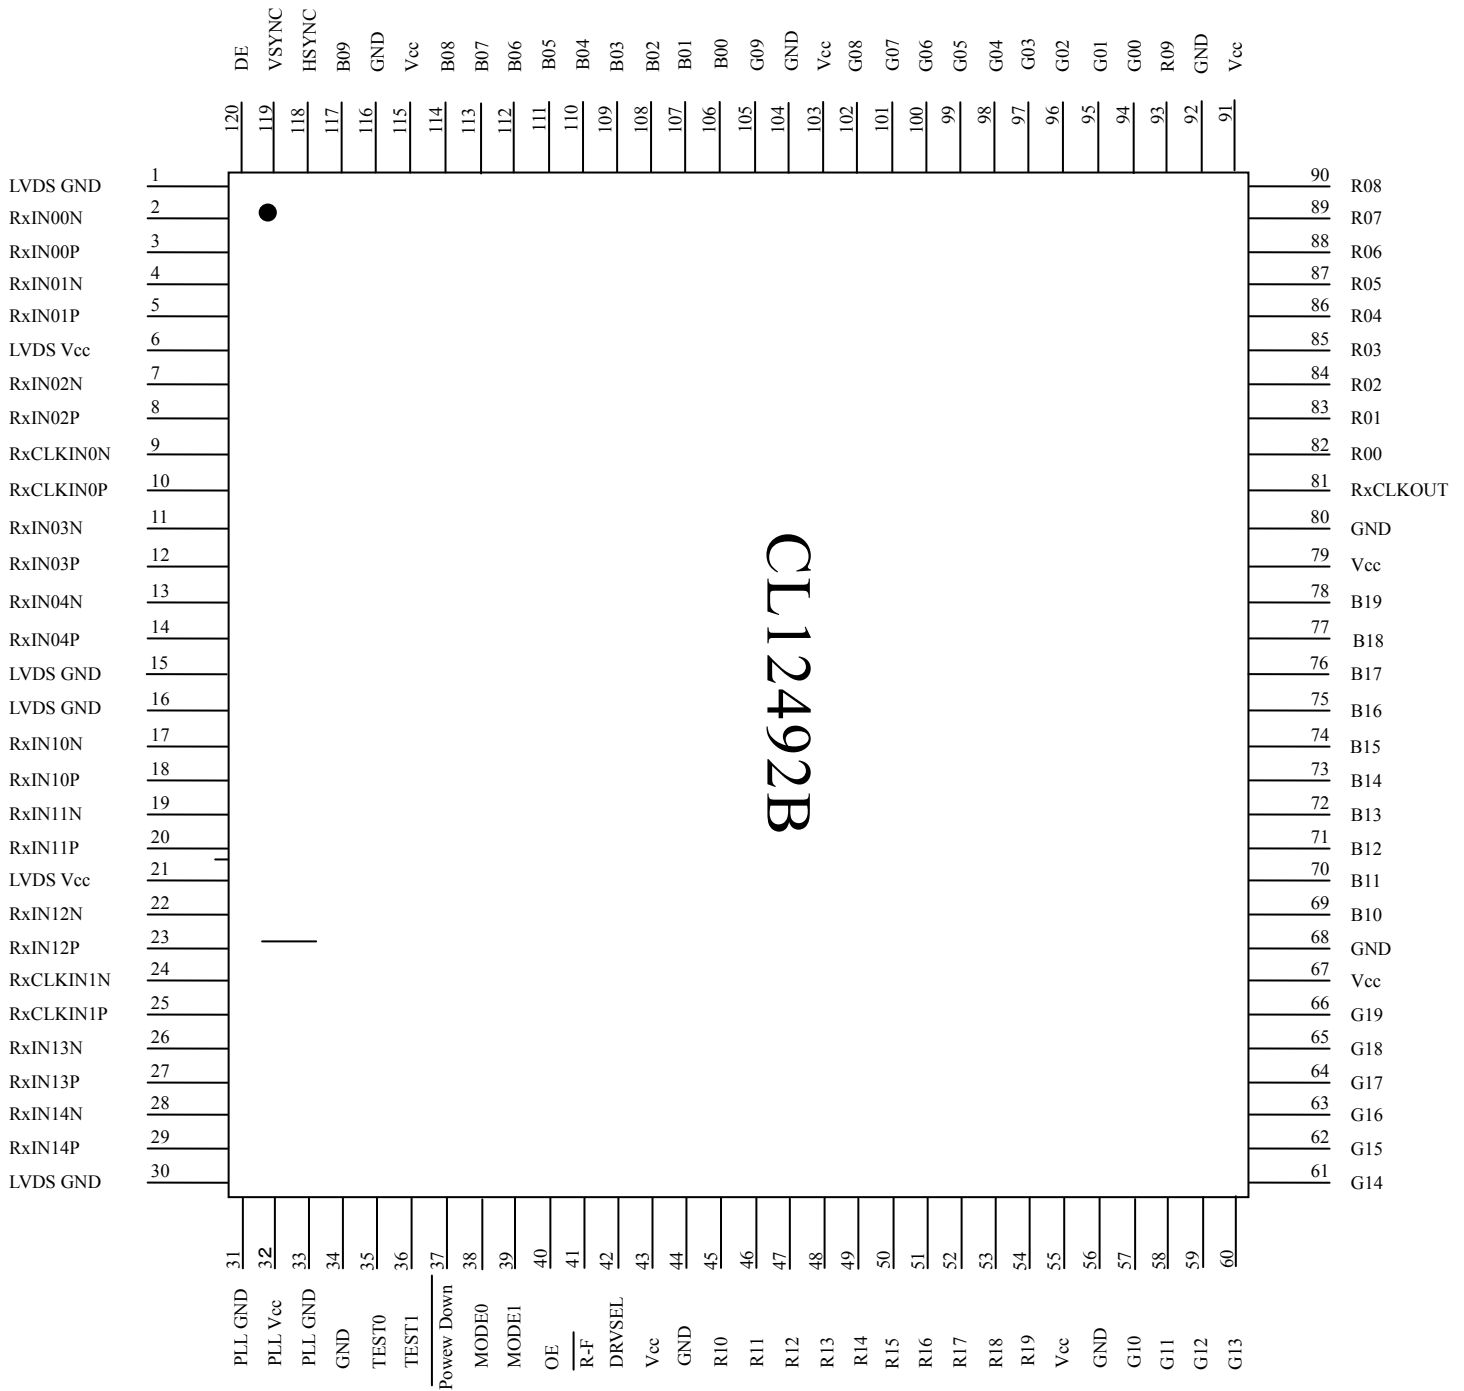

Pin Description

| Pin Name | No of Pin | I/O | Pin Description |
|-------------|-----------|-----|--|
| RxIN00N~04N | 10 | IN | 1st Link LVDS Differential Data Inputs |